

3.16 Manchon de transición

Información del producto

Características


- Rosca macho BSP

Material

- PVC-U = cloruro de polivinilo sin plastificar

Fabricación

- Moldeado por inyección

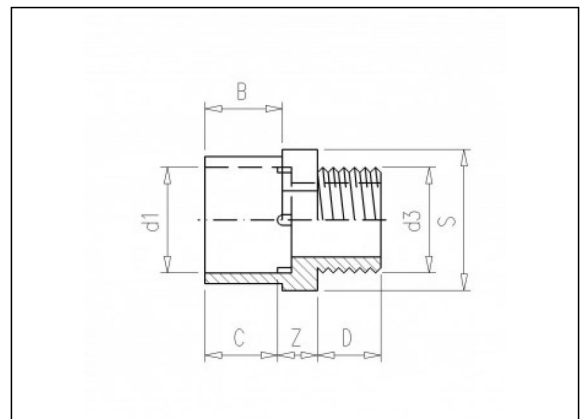

Artículos disponibles

| ART.CODE | d1 | d3 | Z | B | C | D | S | PN | Verp |
|----------|-------|-----------|----|----|----|----|----|----|------|
| 3.15.150 | 2 1/2 | 2 (M) | 26 | 51 | 44 | 26 | 95 | 16 | 48 |
| 3.15.155 | 2 1/2 | 2 1/2 (M) | 27 | 51 | 44 | 30 | 95 | 16 | 48 |
| 3.16.050 | 1/2 | 1/2 (M) | 6 | 14 | 17 | 16 | 32 | 16 | 50 |
| 3.16.055 | 1/2 | 3/4 (M) | 6 | 14 | 17 | 17 | 32 | 16 | 50 |
| 3.16.065 | 3/4 | 3/4 (M) | 12 | 22 | 20 | 17 | 46 | 16 | 50 |
| 3.16.070 | 3/4 | 1 (M) | 9 | 22 | 23 | 21 | 46 | 16 | 50 |

Van de Lande BV

Lissenveld 1 \ 4941 VK Raamsdonksveer \ The Netherlands \ t +31 (0)162 51 60 00 \ f +31 (0)162 52 14 17 \ sales@vandelande.com
 Traderegister Tilburg: 18070844 \ IBAN: NL13 RABO 0143 0035 26 \ BIC: RABONL2U \ VAT: NL 8123.91.755.B01

| ART.CODE | d1 | d3 | Z | B | C | D | S | PN | Verp |
|----------|-------|-----------|----|----|----|----|----|----|------|
| 3.16.085 | 1 | 1 (M) | 9 | 22 | 23 | 21 | 46 | 16 | 50 |
| 3.16.090 | 1 | 1 1/4 (M) | 9 | 22 | 23 | 23 | 46 | 16 | 50 |
| 3.16.100 | 1 1/4 | 1 1/4 (M) | 9 | 26 | 28 | 23 | 55 | 16 | 50 |
| 3.16.105 | 1 1/4 | 1 1/2 (M) | 9 | 26 | 28 | 23 | 55 | 16 | 50 |
| 3.16.120 | 1 1/2 | 1 1/2 (M) | 12 | 31 | 31 | 23 | 65 | 16 | 150 |
| 3.16.125 | 1 1/2 | 2 (M) | 12 | 31 | 31 | 27 | 65 | 16 | 150 |
| 3.16.135 | 2 | 1 1/2 (M) | 13 | 44 | 36 | 23 | 80 | 16 | 120 |
| 3.16.140 | 2 | 2 (M) | 13 | 44 | 36 | 27 | 80 | 16 | 120 |

Van de Lande BV

Lissenveld 1 \ 4941 VK Raamsdonksveer \ The Netherlands \ t +31 (0)162 51 60 00 \ f +31 (0)162 52 14 17 \ sales@vandelande.com
 Traderegister Tilburg: 18070844 \ IBAN: NL13 RABO 0143 0035 26 \ BIC: RABONL2U \ VAT: NL 8123.91.755.B01